


LO 200M

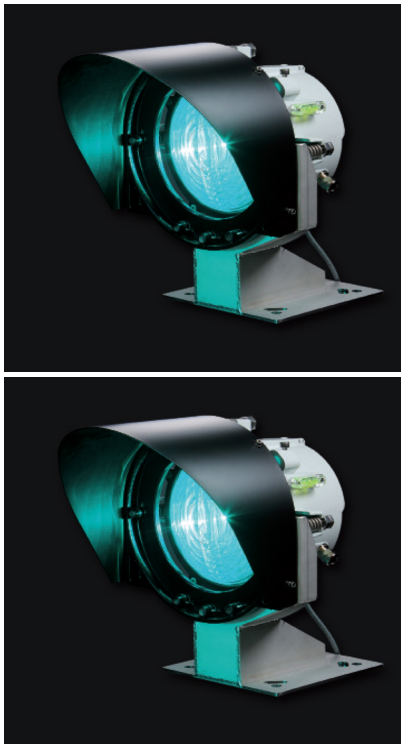

Medium Intensity LED Range Light. The LO 200M signal is designed for applications requiring medium and long range directional light, such as range lights and port entry signals.

[Contact Us](#) [Get a quote](#)

Rating: Not Rated Yet

[Ask a question about this product](#)

Description

[Features](#)

Range Light LO 200M features:

- Equipped with a high intensity power LED and especially designed optics
- Robust aluminium IP 66 housing
- Visual range up to 14 NM ($T_c = 0,74$)
- Standard IALA colours red, green, white and yellow
- Extremely low power consumption, suitable for solar and battery operation
- Integrated flasher with 16 A solar panel charger
- Adjustable intensity and range
- Programmable with Sabik standard IR programming devices

- Optional integrated GNSS synchronization
- Optional integrated LTE-M remote monitoring
- Equipped with Bluetooth programming

[Downloads](#)

Downloads

[_pdf Product datasheet LO 200M \(pdf eng\) \(1000 KB\)](#)

[Product datasheet LO 200M \(pdf ES\)](#)

[Product datasheet LO 200M \(pdf RU\)](#)

[Video on Sabik Bluetooth® Control](#)

[Extranet login](#)

Extranet login